




SILICONISED FILMS

INNOVATIVE FUNCTIONS

POLYESTER

Thickness	12µ to 96µ
Coating	Siliconised 1 or 2 sides
Release	Standard + 2 levels of release
Specialties	Logo printing Metallisation in silver and other colors


Conservation of adhesiveness (Finat 10): ≥ 80%
 Food contact approved (FDA-BGA).
 Release levels HMX and HMP are not available on 12µ

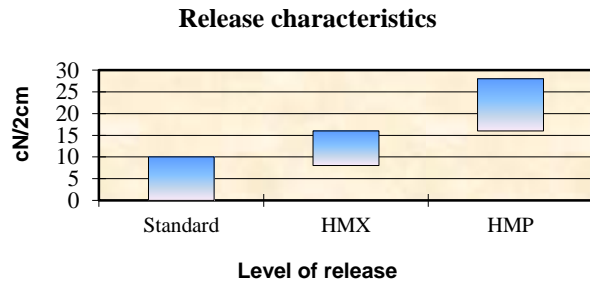

POLYETHYLENE

Thickness	30µ to 60µ
Color	Transparent or white
Coating	Siliconised 1 side
Release	Standard + 1 level of release


Conservation of adhesiveness (Finat 3): ≥ 65%

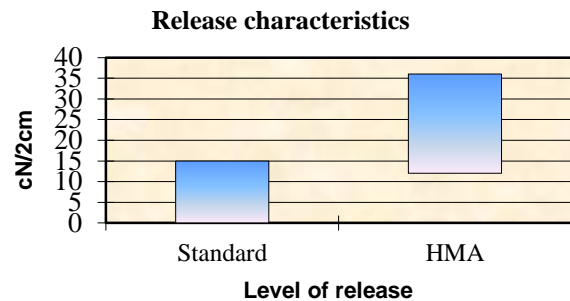

POLYPROPYLENE

Thickness	40µ to 60µ
Color	Transparent or white
Coating	Siliconised 1 side
Release	Standard + 1 level of release
Specialties	Metallisation in silver

Conservation of adhesiveness (Finat 3): ≥ 70%

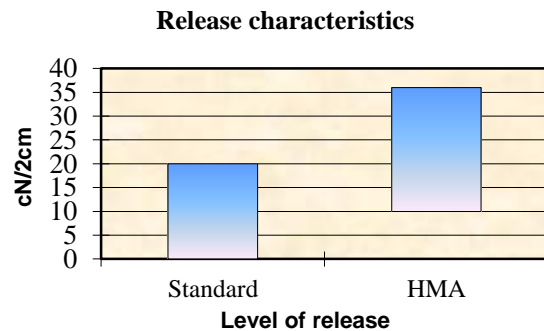

Production specifications

Width	Any width from 15mm to 1600mm
Presentation	Bobbins on core 152mm Pancakes or rewound tapes on core 76mm

Applications

Label Stock	Mastics	Velcro
Protection (Liner, intercalary)	Self adhesives tapes	Telephony
Labels	Bitumen	Medical (patch)

Recommandation

Based on its own experience, REXOR recommends the use of siliconised products within 6 months from the delivery date, in standard storage conditions for polyester film.

Warranty exclusions: refer to REXOR

While REXOR endeavours to ensure that all advice given relating to the use and applications of its products (whether in this leaflet or otherwise) is both correct and useful, the information is based partly on data made available to us from other sources and is not guaranteed as accurate. It is not intended in any way to be exhaustive or as a substitute for the customer's own product testing, evaluation and safety measures. Customers must consider this Data Sheet as indicative. Customers who make use of the products without contacting us do so at their own risk .